

# HI DELTA® SS

A simple and compact solution for all your heating needs.

**150 MBTUH - 399 MBTUH**

**H** 84-85% Efficiency

**WH** 85% Efficiency



Click icon or view standalone page to learn more.



MID EFFICIENCY



## Reliable Performance

- Simple 2-stage firing for reliable heating
- Corrosion-resistant stainless-steel pump with flanges for enhanced operation and longer life
- Patented burner "security blanket" provides a streamlined air-gas pathway for complete sealed combustion



## Venting Flexibility

- Direct vent capable and ducted combustion air ready
- Cat I vertical venting, Cat III sidewall venting (no extractor required for most applications) for easy installation



## Installation Versatility

- Compact design perfect for small spaces (footprint is less than 6.9 ft<sup>2</sup> for all models)
- Durable construction for flexible indoor/outdoor installation
- Available for natural gas or propane to meet your needs



## Simple Controls

- Electronic controller with outdoor reset varies the setpoint as the air temperature changes to optimize performance
- Simple status display lights for easier monitoring and troubleshooting

## Optional Features

- |   |   |
|---|---|
| <input checked="" type="checkbox"/> Cupronickel heat exchanger <sup>1</sup> | <input checked="" type="checkbox"/> Fixed speed pump        |
| <input checked="" type="checkbox"/> Temperature controllers                 | <input checked="" type="checkbox"/> Bronze headers          |
| <input checked="" type="checkbox"/> Cold Water Protection                   | <input checked="" type="checkbox"/> Standard Stock Products |
| <input checked="" type="checkbox"/> Low water cut-off                       |   |

<sup>1</sup>Water heater (WH) models only.


Applicable for hydronic heating for small office buildings, single-family homes, and more.



# Hi Delta SS - Type H & WH Models 151R - 401

Model	MBTUH Input	MBTUH Output	AFUE (%)	Dimensions (in.)				
				A Width	G (NPT)	H (NPT)	K Flue Ø	T Ø
HD151	150	126	85	21-7/8	3/4	1-1/2	4	4
HD201	199	167	85	25-1/16	3/4	1-1/2	5	4
HD251	250	210	85	28-5/16	3/4	1-1/2	5	4
HD301	299	251	85	31-9/16	3/4	1-1/2	5	4
HD401	399	335	84*	38-1/16	3/4	1-1/2	6	4

\*Thermal efficiency

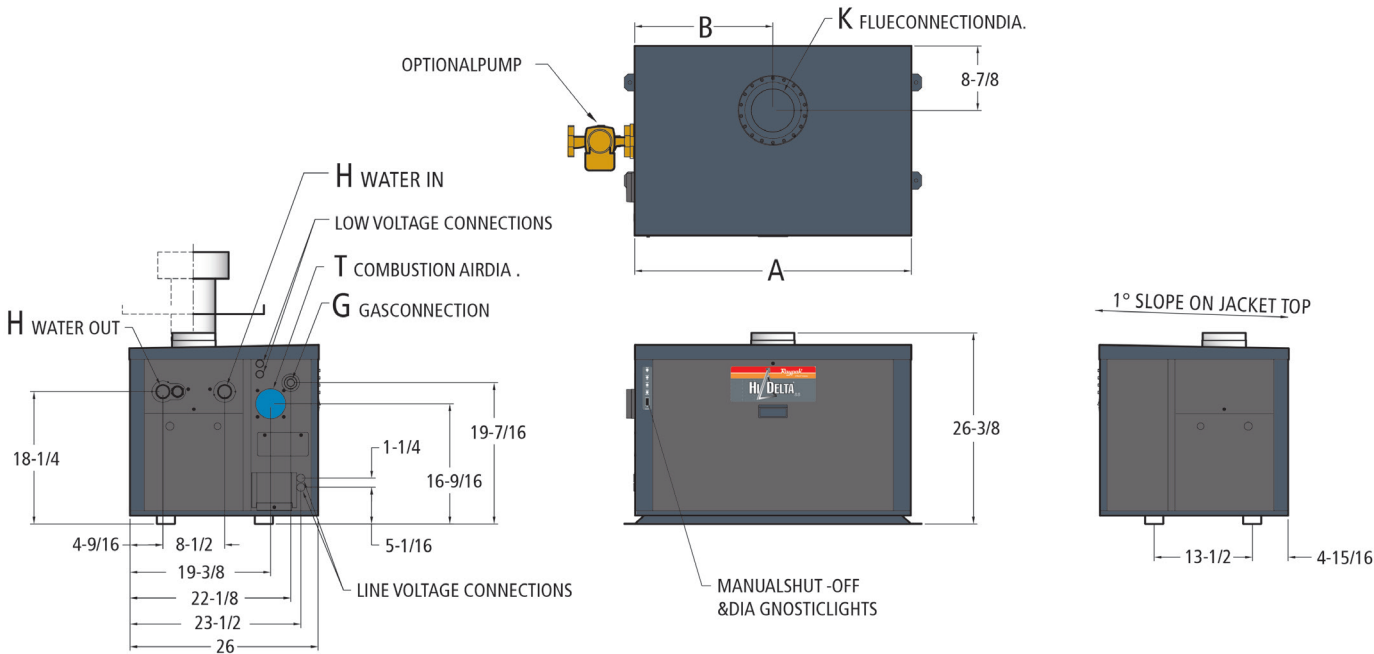

Learn more about  
**Hi Delta SS boilers**  
at [Raypak.com](http://Raypak.com)



Learn more about  
**Hi Delta SS water heaters**  
at [Raypak.com](http://Raypak.com)